





ULX-D™

ULX-D



ULX-D



ULX-D



15 12



ULX-D (AES) 256



Workbench™ 6

Dante™

Wireless



ULX-D

ULX-D™

ULXD4



ULXD4D



ULXD4Q



- 24-bit/48 kHz
- 20 Hz – 20 kHz
- 120 dB
- 60 dB
- 72 MHz
- 8 MHz
- 8 MHz
- 23
- 63
- AES 256
- Wireless Workbench 6
- AXT600 Axient®
- AMX/Crestron
- ½

- 1RU
- Dante




ULX-D™



1mW

- 8MHz 63 ULX-D
- 125 kHz
- 30 100

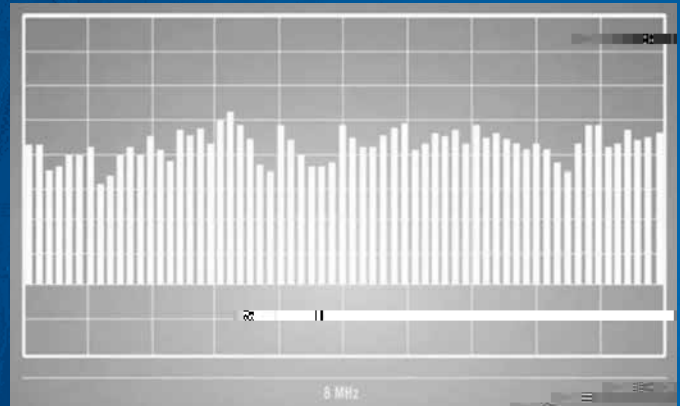

8MHz 63



Dante IP

- Dante ULX-D
- Dante
- ULXD4D ULXD4Q



ULX-D

- ULXD4D ULXD4Q

		470-932 MHz		
		>70 dB		
		<2.9		
		-98 dBm 10 ⁻⁵ BER		
		100		
		20 Hz - 20 kHz		
		>120 dB A		
@ +10	Dante™	130 dB	A	
		<0.1%		
-12 dBFS	@ +10			
		-18°C (0°F) - 50°C (122°F)		



	ULXD4	171 x 197 x 42	x	x		
	ULXD4D	ULXD4Q	482 x 274 x 44		x	x
	ULXD4	0.9				
	ULXD4D	3.36				
	ULXD4Q	3.45				
	ULXD4	15 V DC @ 0.6 A				
	ULXD4D	100 - 240 V AC	50-60 Hz	0.26 A		
	ULXD4Q	100 - 240 V AC	50-60 Hz	0.32 A		
		-18	+42 dB	1 dB		
	¼	6.35	+12 dBV	ULXD4		
	XLR		+18 dBV			-12 dBV
	ULXD4		10/100 Mbps			
	ULXD4D	ULXD4Q	1 Gbps			
	DHCP		IP			
	ULXD4					
	ULXD4D	ULXD4Q				

	ULXD1	86 x 66 x 23	x	x		
	ULXD2	256 x 51	x			
	ULXD1	142				
	ULXD2	340				
@ 10 mW		SB900		11		
	2	AA		11		
		1 mW, 10 mW, 20 mW				
	ULXD1					
	ULXD2					
	ULXD1	¼				
	ULXD2					