





ULX-D™



ULX-D



15

12



Workbench™ 6

Dante™

Wireless

ULX-D



ULX-D



ULX-D

(AES) 256



ULX-D

ULX-D™

ULXD4



ULXD4D



ULXD4Q



- 24-bit/48 kHz
- 20 Hz – 20 kHz
- 120 dB
- 60 dB
- 72 MHz
- 8 MHz
- 8 MHz
- 23
- 63
- AES 256
- Wireless Workbench 6
- AXT600 Axient®
- AMX/Crestron
- ½

- 1RU
- Dante

-
- 120 dB
-
- AES 256
- -
-
- SB900 11
- SBC200
- 2 AA 11
- LCD
- 100
-
-
-

SBC00 SBC20 SM58




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

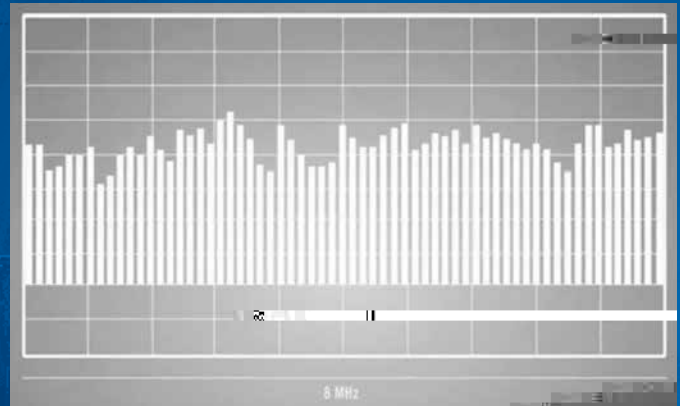

8MHz 63

 Dante™

Dante IP

- Dante
 - Dante
 - ULXD4D ULXD4Q
- ULX-D



ULX-D

- ULXD4D ULXD4Q

470-932 MHz
>70 dB
<2.9
-98 dBm 10 ⁻⁵ BER
100
20 Hz - 20 kHz
>120 dB A
@ +10 Dante™ 130 dB A
<0.1%
-12 dBFS @ +10
-18°C (0°F) - 50°C (122°F)



ULXD4 171 x 197 x 42 x x
ULXD4D ULXD4Q 482 x 274 x 44 x x
ULXD4 0.9
ULXD4D 3.36
ULXD4Q 3.45
ULXD4 15 V DC @ 0.6 A
ULXD4D 100 - 240 V AC 50-60 Hz 0.26 A
ULXD4Q 100 - 240 V AC 50-60 Hz 0.32 A
-18 +42 dB 1 dB
¼ 6.35 +12 dBV ULXD4
XLR +18 dBV -12 dBV
ULXD4 10/100 Mbps
ULXD4D ULXD4Q 1 Gbps
DHCP IP
ULXD4
ULXD4D ULXD4Q

ULXD1 86 x 66 x 23 x x
ULXD2 256 x 51 x
ULXD1 142
ULXD2 340
@ 10 mW SB900 11
2 AA 11
1 mW, 10 mW, 20 mW
ULXD1
ULXD2
ULXD1 ¼
ULXD2