


# VPX728S

18"

- ▶ 18" JBL 2044H
- ▶
- ▶

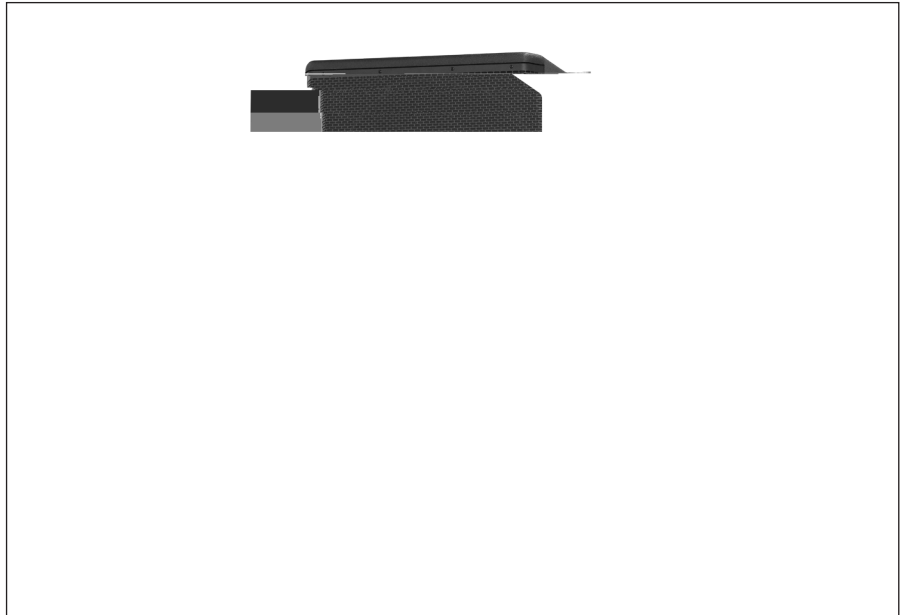

VPX728S  
18"

VPX728S 18" (457mm) JBL 2044H  
1000W

VPX728S  
Neutrik®Speakon®NL-4  
+1/-1 +2/-2

VPX728S  
DuraFlex™  
16 CNC

		(-10 dB)	35 Hz - 250 Hz
		(±3 dB)	40 Hz - 250 Hz
			+1/-1 +2/-2
			80 - 120 Hz, 24 - 48 dB/octave
			1000 W/2000 W/4000 W, 2 <sup>1</sup>
	( / / )		800 W/1600 W/3200 W, 100 <sup>1</sup>
			133 dB (139 dB) <sup>2</sup>
	(1w@1m)		97 dB SPL; 103 dB SPL <sup>2</sup>
			2 × 18" (457 mm) JBL 2044H
			4 Ohms
			18 mm
			DuraFlex™
			16
			2 × Neutrik®Speakon®NL-4
	(H × W × D)		1080 mm × 533 mm × 700 mm (42.5 in × 21.0 in × 27.6 in)
			54.16 Kg (119.4 lbs)
1		40 Hz - 400 Hz	6 dB
2			

VPX728S 18"

---

:

mm



JBL Professional  
8500 Balboa Boulevard, P.O. Box 2200  
Northridge, California 91329 U.S.A.  
© Copyright 2018 JBL Professional  
[www.jblpro.com](http://www.jblpro.com)