

Vi1000™

96-CHANNEL COMPACT DIGITAL MIXING CONSOLE



96 Inputs / 24 Outputs
Plus LRC master busses

Ultra-compact footprint
With Vistonics II knobs-on-glass functionality and Faderglow

Standalone DSP
With BSS DPR901ii DEQ, vMIX automixing & Lexicon multiFX

Instant Dante
Facilitates instant connection to industry standard Dante audio networks

Vi1000™

Soundcraft®
by HARMAN

96-CHANNEL COMPACT DIGITAL MIXING CONSOLE

APPLICATIONS ■

RENTAL COMPANIES
TOURING
CORPORATE A/V
MUSIC VENUE INSTALLATION

PHYSICAL SPECIFICATIONS ■

WEIGHT:

Vi1000 console only: 25kg (55lbs)

Vi1000 console incl. standard shipping carton: 46kg (102lbs)

DIMENSIONS: 84mm (3.2") x 803mm (31.6") x 351mm (13.8")

TECHNICAL SPECS ■

CONTROL SURFACE

I/O Faders:
8 (16 when assigned to output faders)
Output Faders:
8 + 3 + 1
Tap Faders:
20
Voice II:
2 (1 input, 1 master)

LOCAL I/O PHYSICAL CONNECTORS

Tail I/O:
212 in/212 out
M/L I/O:
16 Soundcraft HQ preamps
L O I/O:
16
AES/EBU I (SRC):
2 (4ch)
AES/EBU O I/O:
2 (4ch)

TB M:
1 front panel with rear panel 48V on/off sw
P I/O:
1 stereo jack, under front armrest
Data:
1x 64ch
MADI O I/O:
64 in/64 out
D21 O S:
2x double/4 single (total 128ch)

DSP MIXING CORE


I/O C I/O:
96 mono Pairable to 48 stereo
B I/O - A I/O/G:
24 mono or stereo
B I/O - Ma:
From bus pool – max 16 mono/stereo
B I/O - Ma:
3 (LRC)

Analogue:

64 external + 8 DEQ + 4FX
L FX:
4 Stereo reverb/delay/pitch effects
BSS GEQ:
All mono/stereo busses and masters
BSS DPR901 DEQ:
8 instances
MIX A I/O:
2x16ch instances

EXTERNAL CONTROL PORTS

E:
1 (for Mirroring and external control)
MIDI:
1 In 2 Out
Ma I/O:
2, switched, for redundant PSUs.
USB2.0:
4 (2 front, 2 rear)
W:
In /Out 2x BNC

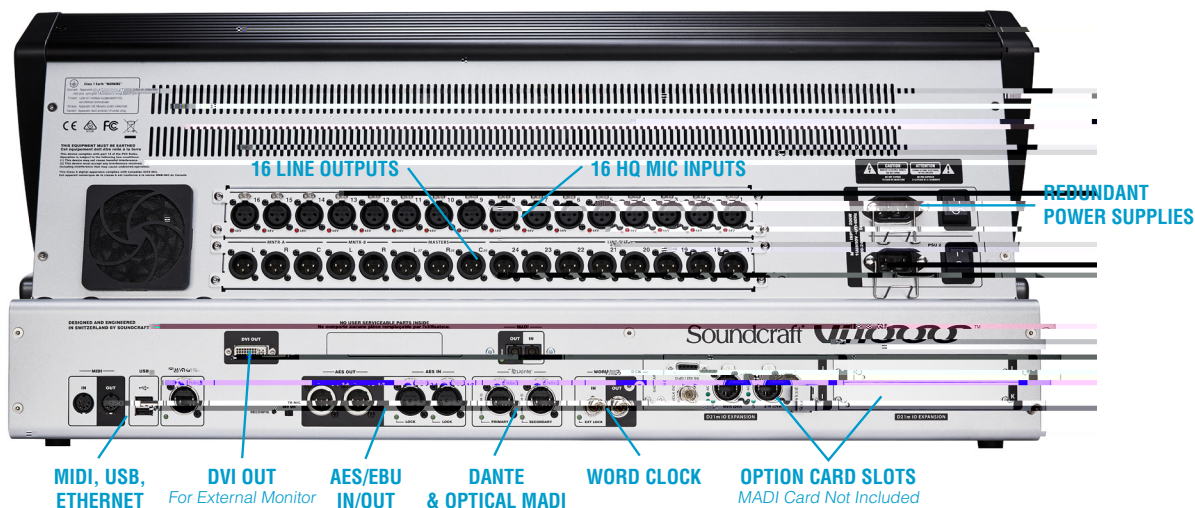

Vi1000™

96-CHANNEL COMPACT DIGITAL MIXING CONSOLE

Soundcraft®
by HARMAN

PHYSICAL DIMENSIONS ■

